

<u>sales@mccallumhinges.com.au</u> <u>www.mccallumhinges.com.au</u>



About McCallum Australia

McCallum Australia has been manufacturing high quality hardware products for the Australian market since 1939.

Our products are designed and developed in Australia, made from the highest quality materials and processes to exceed the high demands of Australian Standards and the market.

McCallum Australia is the pre-eminent hinge manufacturer for Australia. Our products have been used in hundreds of thousands of projects across Australia – including some of the most prominent such as, The Sydney Opera House, New Parliament House Canberra, and Crown Casino.

McCallum's pioneered the extruded aluminium hinge that features aluminium pressed endcaps, keyed flanged nylon bearings and stainless-steel hinge pins. We have included these innovative design features in our popular heavy duty fast-fix hinge range.

Our range of products are used extensively throughout the Australian market and are sort after by tradespeople, specifiers and technicians for new projects, repairs, refurbishments, and retrofits.

McCallum Australia products are sought for their key attributes:

- Quality
- Reliability
- Technical innovation
- Value

We support this with a focus on strong customer support.

McCallum representatives and stockists would be pleased to discuss and offer advice regarding your hardware requirements.

For additional technical information please contact us +61 2 9698 5111 sales@mccallumhinges.com.au





CONTENTS

SPG771-77mm	 P76
SPG772-77mm	 P77
SPG773-77mm	 P78
SPG790-90mm	 P79
A177	 P80
A178	 P81

— I



STAINLESS STEEL SPRING HINGE

Code No. SPG771-77mm

APPLICATION

.Suitable for fixed panel & glass door .Self closing .Left or right hand open

SPECIFICATION

.Material 316 Grade .Knuckle: Round--22mm dia and brass ferrule. Steinless steel end cap

INSTALLATION GUIDE ONLY

.Max width: 1067mm .Max weight: 30kg each pair

FIXING

Plain / drilling hole avaiable


FINISH

Screws & plate supplied

SIZES AVAIABLE

Polish finish and satin finish avaiable.

Code No. SPG771




0



STAINLESS STEEL SPRING HINGE

Code No. SPG772-77mm

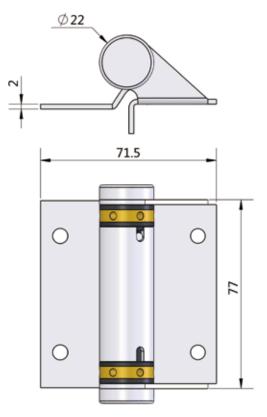

APPLICATION

.Suitable for fixed panel & glass door .Self closing .Left or right hand open

SPECIFICATION

.Material 316 Gradet .Knuckle: Round--22mm dia and brass ferrule. Steinless steel end cap

INSTALLATION GUIDE ONLY


.Max width: 1067mm .Max weight: 30kg each pair

FIXING

Screws & plate supplied

FINISH

Polish finish and satin finish avaiable.





Code No. SPG772



STAINLESS STEEL SPRING HINGE

Code No. SPG773-77mm

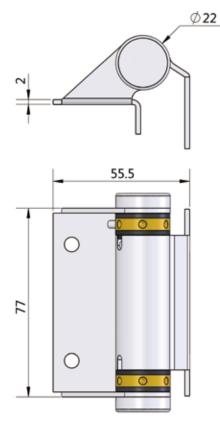



APPLICATION

.Suitable for fixed panel & glass door .Self closing .Left or right hand open

SPECIFICATION

.Material 316 Gradet .Knuckle: Round--22mm dia and brass ferrule. Steinless steel end cap

INSTALLATION GUIDE ONLY

.Max width: 1067mm .Max weight: 30kg each pair

FIXING

Screws & plate supplied

FINISH


Polish finish and satin finish avaiable.

Code No.SPG773

Page 78



STAINLESS STEEL SPRING HINGE

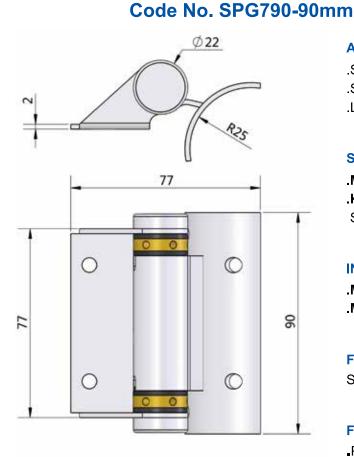

APPLICATION

.Suitable for fixed panel & glass door .Self closing .Left or right hand open

SPECIFICATION

.Material 316 Gradet .Knuckle: Round--22mm dia and brass ferrule. Steinless steel end cap

INSTALLATION GUIDE ONLY

.Max width: 1067mm .Max weight: 30kg each pair

FIXING

Screws & plate supplied

FINISH


Polish finish and satin finish avaiable.

Code No.SPG790



ALUMINIUM SPRING HINGE

Code No. A177



APPLICATION

- Suitable for self closing timber doors where traditional hydraulic door closers are unabled to be installed
- Installation to timber doors to timber or metal jambs

SPECIFICATION

- Alloy: High Strength T6 minimum 254 mpa
- Bushes: Flanged Nylon
- Knuckle: Round
- Maximum Door Weight: 50kg
- Adjustable closing speed

INSTALLATION GUIDE ONLY

- Door thickness: Minimum 35mm
- Standard Door: 2040 (H) x 820 (W) Max Weight 20kg 2 hinges
- **Tested for doors:** 2100 (H) x 950 (W) Max Weight 50kg 3 hinges


FIXING

Fixing screws supplied

- 32mm x 10g fasteners to suit timber doors
- 12mm x M5 fasteners to suit metal jambs
- Pop Rivets are NOT RECOMMENDED

FINISH

- SNA Satin Natural Anodised.
- Black Black Powder Coat
- White White Powder Coat




Ø18.4

Code No.A177



ALUMINIUM SPRING HINGE

Code No. A178



APPLICATION

- Suitable for self closing timber doors where traditional hydraulic door closers are unabled to be installed
- Installation to timber doors to timber or metal jambs

SPECIFICATION

- Alloy: High Strength T6 minimum 254 mpa
- Bushes: Flanged Nylon
- Knuckle: Round
- Maximum Door Weight: 50kg
- Adjustable closing speed

INSTALLATION GUIDE ONLY

- Door thickness: Minimum 35mm
- Standard Door: 2040 (H) x 820 (W) Max Weight 20kg 2 hinges
- Tested for doors: 2100 (H) x 950 (W) Max Weight 50kg 3 hinges

FIXING

Fixing screws supplied

- 32mm x 10g fasteners to suit timber doors
- 12mm x M5 fasteners to suit metal jambs
- Pop Rivets are NOT RECOMMENDED

FINISH

- SNA Satin Natural Anodised.
- Black Black Powder Coat
- White White Powder Coat



